

FACTORY FURNITURE



Osso Planter (1.5x1.5x0.9m)

Introduction

Design

Design, shop drawings and development by Factory Furniture Ltd

Manufacture

Factory Furniture manufactured components. Products are assembled in Factory workshops, checked and dispatched ready for installation. Replacement products or components should be ordered direct from Factory Furniture Ltd.

Copyright

The design copyright for the product and drawing copyright remains the sole property of Factory Furniture Ltd.

Timber

All timber used in Factory Furniture products is FSC® certified




Contents

Spec Sheet

Detailed Materials

Maintenance & Repair

NBS Specifications

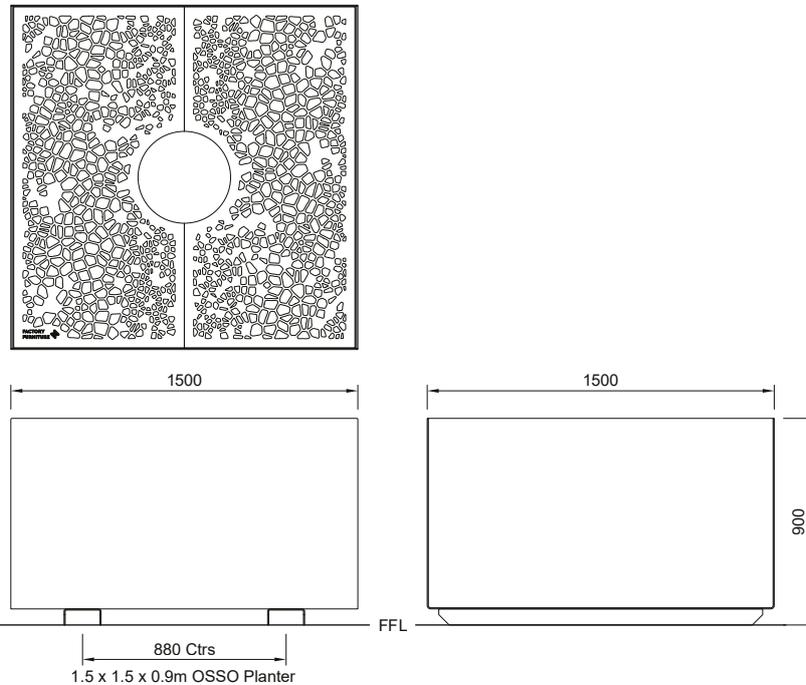

Composition

Planter sides - Galvanised steel (standard) or Aluminium

Top panel - Corten Steel

Finishes

Body - Natural Galvanised steel or Aluminium Polyester powder coated (any Ral colour).

Corten - Steel is left untreated.

Dimensions

Metric L - 1500mm | W - 1500mm | H - 900mm

Imperial L - 4' 11" | W - 4' 11" | H - 2' 11½"

Approx weight

163kg

Forklift channel centres

880mm (2' 10½")

Handling

Please observe health & safety lifting guidelines. A forklift or crane will be required for off-loading and positioning of this product.

Maintenance

Depends on usage and position. All elements will require annual cleaning. Powder coated surfaces only require maintenance if damaged. Corten requires no further maintenance.

Detailed Material & Finish Specifications

Planter

- Manufactured from lasercut steel sheet - all welded construction galvanised after manufacture
- Polyester powder coat finish (colour - grey as standard or as per customer specification)

Forklift Channels

- Manufactured from folded aluminium sheet
- Bolted to planter

Top Panels

- Manufactured from lasercut Corten steel
- Top panels come in two halves, are removable and rest on top lip of planter

General Maintenance (Recommended Schedule & Guidelines)

Daily/Weekly/Monthly (or as adopted)

Visual checks of bench top and base - check all items for superficial or physical damage.

Three Monthly

Clean all items as detailed below check all fixings are seated correctly; inspect timber for serious damage and splinters.

Six Monthly

Secure all fixings; full clean as detailed below; check that bench is firmly secured to the ground

Specific Maintenance Details

FSC Timber

Clean with a stiff brush once per year, especially in more exposed locations, in order to prevent a verdigris type build up on the timber surface. Ideally this should be completed in early spring. During the cleaning stage, all exposed timber surfaces should be inspected for splits and splinters. Any splinters and graffiti should be removed and the surface sanded with 100 grit sandpaper in order to remove any uneven / sharp edges or surfaces.

During the first few months after installation the tannin naturally occurring in the timber may leach out and cause a brown staining on the bases. This may be removed with a light solution of household bleach and water.

Polyester Powder Coated & Galvanised

For general cleaning using a damp cloth and warm soapy water only. Scourers and abrasive cleaners are NOT suitable for this type of finish and may damage it. Before using any cleaning agents to remove graffiti etc. try on a small, inconspicuous area first to avoid causing more unsightly damage.

Corten Steel & Stainless Steel (polished stainless steel only)

Clean as required, but at least every three months. For stainless use a stainless steel polish and a lint free cloth. To remove ground in dirt, a stainless steel finishing pad may be required.

Concrete (also granite)

Clean with a stiff brush once per year, especially in more exposed locations, in order to prevent a verdigris type build up on the surface. Ideally, this should be completed in early spring.

Repairs

FSC Timber

For light damage, please see section on specific maintenance details above. For instances of heavy damage, the timber item should be replaced. Please order against the part number reference in the reordering section towards the end of this manual.

Polyester Powder Coated & Galvanised Surfaces

For light damage (scratches, chips etc.) repair using touch-up paint to match original colour (available from Factory Furniture Ltd). Paint application should be carried out in accordance with approved methods detailed by the paint manufacturer. Please note that it is advisable to use professional painters to achieve best results when touching up larger areas. Products for respraying larger areas are available from Factory Furniture Ltd.

Corten Steel

There is no need to repair light damage (scratches, chips etc.) to the rust coloured layer on the surface of the Corten steel. This layer will naturally reform within a short period of time in an external environment.

Stainless Steel

Light damage (surface scratches etc.) can be removed using an emery pad (240 grit) and freeing oil such as 'WD40'. Care should be taken to follow the direction of the brushing grain. It is recommended that a trial repair be carried out on an unimportant surface first. No corrosive cleaners or other abrasives should be used. Any contamination, particularly carbon steel scuffs from vehicles, should be quickly removed to avoid corrosion.

Heavy Damage

In the event of serious damage to any component, replacements should be ordered from Factory Furniture Ltd. Should further assistance be required (or if the product needs to be disassembled for any reason), please contact Factory Furniture for detailed technical advice.tvv

NBS Specification Data

PRODUCT REFERENCE – FF4004 – OSSO PLANTER

Description Planter with steel or aluminium frame (option) and corten steel lid
Uniclass 2015 Category Ss_45_40_28_25 External planter systems
Design as per drawing: FF4004

MANUFACTURER

Name Factory Furniture Ltd
Address Unit 5 Pioneer Road, Faringdon, Oxfordshire, SN7 7BU
Website www.factoryfurniture.co.uk
Telephone +44 (0)1367 242731

MATERIAL

Frame Galvanised steel or aluminium (option)
Lid Corten Steel

FINISH

Aluminium Polyester powder coated

SIZES

1500mm x 1500mm x 900mm (LxWxH)

FIXING

Free standing