# **FACTORY FURNITURE**



Osso<sup>3</sup> Bench

OPERATION & MAINTENANCE MANUAL



# Introduction

### Design

Design, shop drawings and development by Factory Furniture Ltd.

#### Manufacture

Factory Furniture manufactured components. Products are assembled in Factory workshops, checked and dispatched ready for installation. Replacement products or components thereof should be ordered direct from Factory Furniture Ltd.

## Copyright

The design copyright for the product and drawing copyright remains the sole property of Factory Furniture Ltd.

# **General Specifications**

#### Osso<sup>3</sup> Bench

*Metric* length 2720mm | width 2385mm | height 470mm \*

Imperial length 8' 11" | width 7' 10" | height 1' 61/2" \*

Approx Weight 124kg

**Fixing Centres** See installation drawings at end of manual

# Materials & Finishes

## Main Body

- Manufactured from mild steel hot dipped galvanised with polyester powder coat finish (powder coat colour grey as standard or to customer specification)
- Bench anchored to ground using 6 no. M10 x 75mm sleeve anchors per bench

# General Maintenance

(Recommended Schedule & Guidelines)

# Daily/Weekly/Monthly (or as adopted)

Visual checks of bench - check all items for superficial or physical damage

#### **Three Monthly**

Clean all items as detailed below check all fixings are seated correctly

## **Six Monthly**

Secure all fixings; full clean as detailed below; check that bench is firmly secured to the ground

# Specific Maintenance Details

## **Polyester Powder Coated & Galvanised**

For general cleaning using a damp cloth and warm soapy water only. Scourers and abrasive cleaners are NOT suitable for this type of finish and may damage it. Before using any cleaning agents to remove graffiti etc. try on a small, inconspicuous area first to avoid causing more unsightly damage.

# Repairs

## **Polyester Powder Coated & Galvanised Surfaces**

For light damage (scratches, chips etc.) repair using touch-up paint to match original colour (available from Factory Furniture Ltd). Paint application should be carried out in accordance with approved methods detailed by the paint manufacturer. Please note that it is advisable to use professional painters to achieve best results when touching up larger areas. Products for respraying larger areas are available from Factory Furniture Ltd.

## **Heavy Damage**

In the event of serious damage to any component, replacements should be ordered from Factory Furniture Ltd. Should further assistance be required (or if the product needs to be disassembled for any reason), please contact Factory Furniture for detailed technical advice.




# Installation Instructions


All installation works to be carried out by competent personnel - install as complete unit.

# Osso<sup>3</sup> Bench (surface fix only)

- 1. If necessary bolt three bench elements together using 3 no. fixing plate spacers and 12 no. M8 x 30mm button head bolts & locknuts provided.
- 2. Install suitable foundation pads (see illustration) each with top face at ground level
- 3. Position bench in correct orientation with bases centrally on foundation pads, then mark hole positions through base plates.
- 4. Remove the bench; drill holes Ø16mm x 75mm deep (or as bolt manufacturer's recommendations). Clear debris from holes.
- 5. Reposition bench and fix to foundation pads using 6 no. zinc-coated M10 x 75mm sleeve anchors tightened to 50Nm (or as per manufacturer's instruction). Check levels

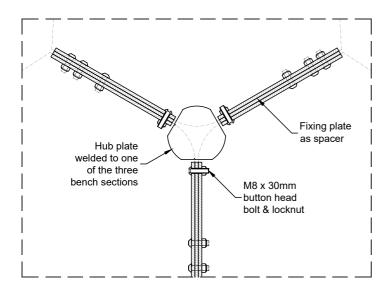



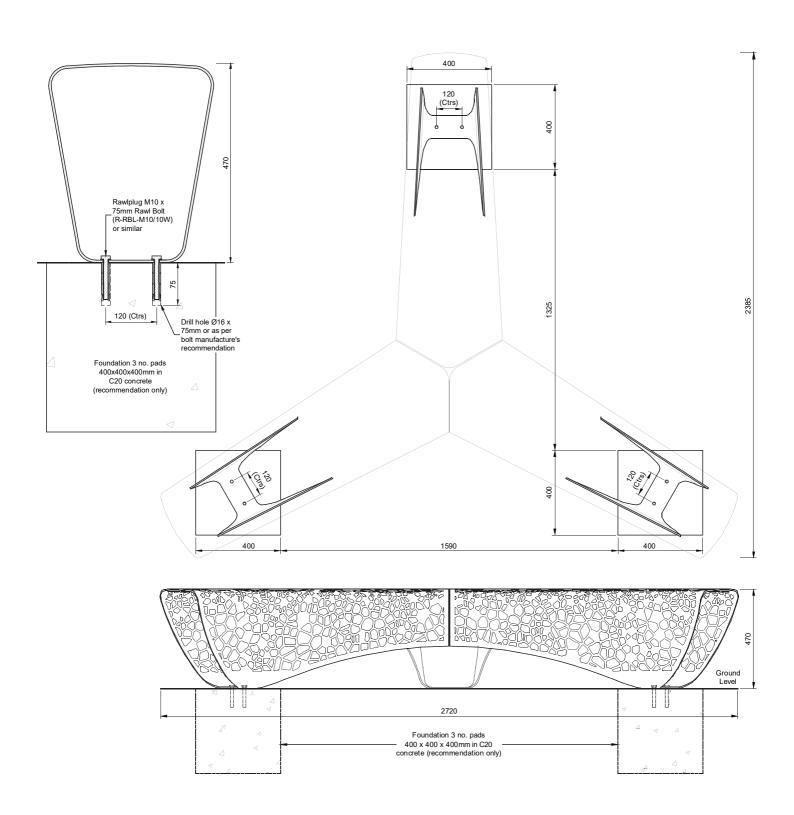

5 Pioneer Road, Faringdon, Oxfordshire SN7 7BU +44 (0)1367 242731 hello@factoryfurniture.co.uk

