
FACTORY FURNITURE



Pik Bench

TECHNICAL SHEET



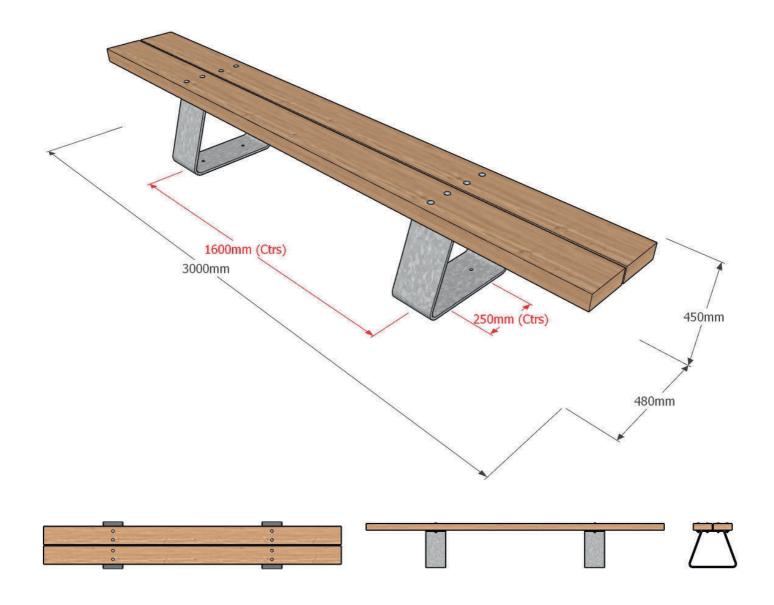

Composition

Slats - FSC® certified softwood* Frame - Mild steel



Finishes

Timber - Tanalised sanded finish as standard.
*Option for Shou Sugi Ban (charred) and other FSC timbers available

Mild steel - Galvanised as standard (polyester powder-coated option available**)

Dimensions

Metric L - 3000mm | W - 480mm | H - 450mm | mperial L - 9' 10" | W - 1' 7" | H - 1' 5½"

Approx weight

Fixing centres 1600mm (5' 3") x 250mm (10")

Fixing method

2 off sleeve anchors per leg (4 total)

Foundation

2 no. pads $400 \times 500 \times 400 \text{ mm}$ in C20 concrete (recommendation only)

Handling

Please observe health and safety lifting guidelines. A fork lift or crane will be required for off loading and positioning of this product

Maintenance

Depends on usage and position. All elements will require annual cleaning. Galvanised and powder coated mild steel only require maintenance if damaged.

**Please note that when powder-coat is applied over a hot dip galvanised surface pinholing can ccur in the surface finish - this is not considered a defect.

