


FACTORY FURNITURE



Pik Cycle Stand

OPERATION & MAINTENANCE MANUAL



Introduction

Design

Design, shop drawings and development by Factory Furniture Ltd.

Manufacture

Factory Furniture Ltd. manufactured components. Products are assembled in Factory workshops, checked and dispatched ready for installation. Replacement products or components thereof should be ordered direct from Factory Furniture Ltd.

Copyright

The design copyright for the product and drawing copyright remains the sole property of Factory Furniture Ltd.

General Specifications

Bike Stand

Metric length 180mm | width 100mm | height 730mm*
Imperial length 7" | width 4" | height 2' 4½"

*Not including +250mm below ground level for sub-surface fix

Approx Weight 15kg

Fixing Centres N/A

Detailed Material & Finish Specifications

Frame

- Manufactured from mild steel - hot dipped galvanised finish
- Root fixed 250mm (10") below ground level

General Maintenance

(Recommended Schedule & Guidelines)

Daily/Weekly/Monthly (or as adopted)

Visual checks of bike stand for superficial or physical damage

Three Monthly

Clean all items as detailed below inspect timber for serious damage.

Six Monthly

Full clean as detailed below; check that bike stand is firmly secured in the ground

Specific Maintenance Details

Galvanised

For general cleaning using a damp cloth and warm soapy water only. Scourers and abrasive cleaners are NOT suitable for this type of finish and may damage it. Before using any cleaning agents to remove graffiti etc. try on a small, inconspicuous area first to avoid causing more unsightly damage.


Repairs


Galvanised Surfaces

For light damage to hot dipped galvanised finishes repair using a high performance cold galvanising zinc spray (70% zinc or above). Spray application should be carried out in accordance with approved methods detailed by the product manufacturer. Please note that it is advisable to use professional painters to achieve best results when touching up larger areas.

Heavy Damage

In the event of serious damage to any component, replacements should be ordered from Factory Furniture Ltd. Should further assistance be required (or if the product needs to be disassembled for any reason), please contact Factory Furniture for detailed technical advice.



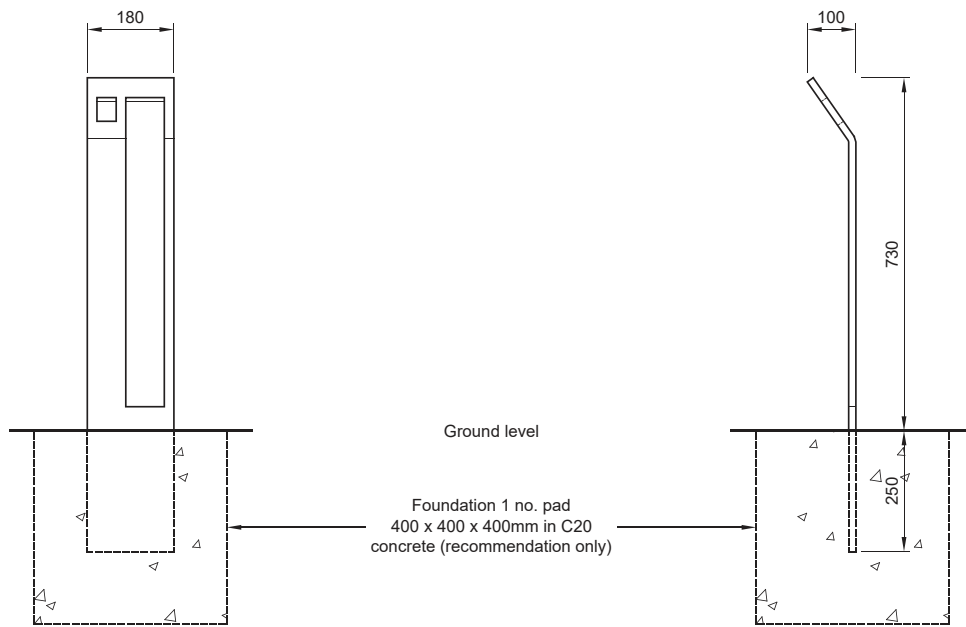

Pik Cycle Stand (*Sub-surface Fix Only*)

Installation Instructions

All installation works to be carried out by competent personnel - install as complete unit.

Pik Cycle Stand (sub-surface fix only)

1. Install suitable foundation pad (see illustration) with top face at ground level
2. As soon as possible after pouring concrete for pad, position bike stand in correct orientation centrally in foundation pad. Maintain bike stand at correct height (250mm below ground) and vertical whilst concrete sets (at least 24 hours).

5 Pioneer Road, Faringdon,
Oxfordshire SN7 7BU
+44 (0)1367 242731
hello@factoryfurniture.co.uk

