



FACTORY FURNITURE



Pik Seat (sub-surface fix)

TECHNICAL SHEET



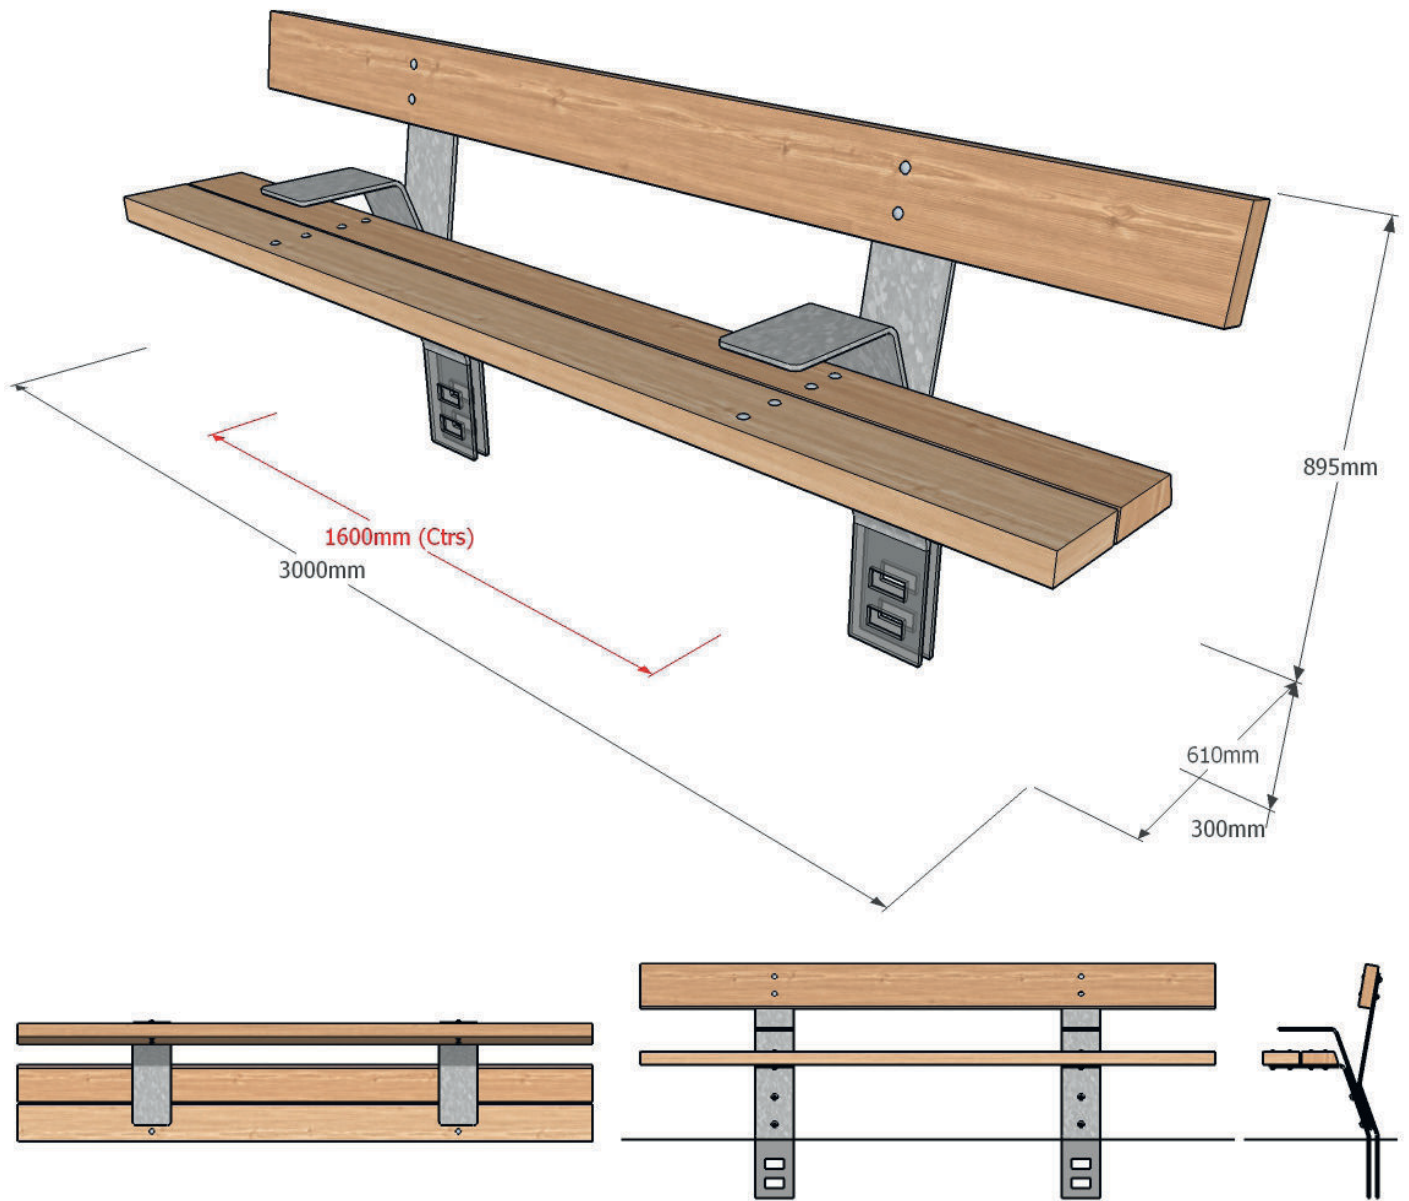

Composition

Slats - FSC® certified softwood*

Frame - Mild steel



Finishes

Timber - Tanalised sanded finish as standard.

*Option for Shou Sugi Ban (charred) and other FSC timbers available

Mild steel - Galvanised as standard (polyester powder-coated option available**)

Dimensions

Metric L - 3000mm | W - 610mm | H - 895mm*

Imperial L - 9' 10" | W - 2' 0" | H - 2' 11"*

*Not including +300mm (12") below ground level

Fixing centres & method

1600mm (5' 3") - Legs root fixed 300mm (12") below ground level in concrete pads

Approx weight

204kg

Foundation

2 no. pads 400 x 400 x 400 mm in C20 concrete (recommendation only)

Handling

Please observe health and safety lifting guidelines. A fork lift or crane will be required for off loading and positioning of this product

Maintenance

Depends on usage and position. All elements will require annual cleaning. Galvanised and powder coated mild steel only require maintenance if damaged.

**Please note that when a powder-coat is applied over a hot dip galvanised surface pinholing can occur in the surface finish - this is not considered a defect.

