





FACTORY FURNITURE



Quay Stool

TECHNICAL SHEET



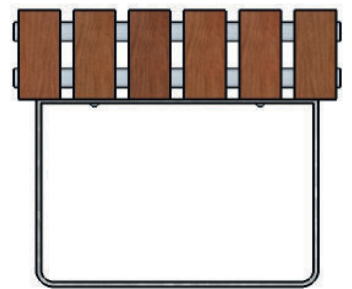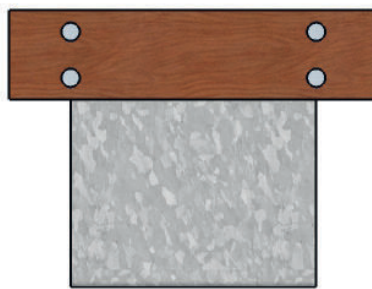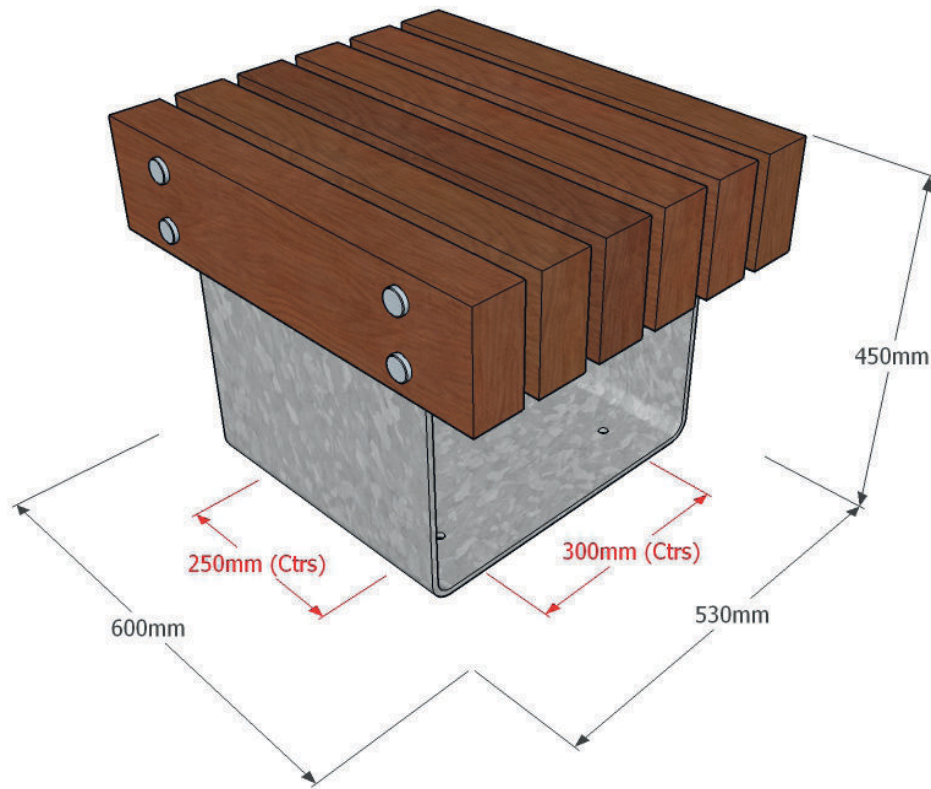

Composition

Slats - FSC® certified hardwood or FSC® certified tanalised softwood

Frame - Mild steel



Finishes

Timber - Untreated sanded finish as standard. (Softwood option tanalised sanded finish as standard).

Mild steel - Galvanised as standard (polyester powder-coated option available)*

Dimensions

Metric L - 600mm | W - 530mm | H - 450mm

Imperial L - 1' 11½" | W - 1' 9" | H - 1' 5½"

Approx weight

76kg (53kg softwood option)

Fixing centres

250mm (10") x 300mm (12")

Fixing method

4 off resin fixed anchors

Foundation

2 no. pads 500 x 400 x 600 mm in C20 concrete (recommendation only)

Handling

Please observe health and safety lifting guidelines. A fork lift or crane will be required for off loading and positioning of this product

Maintenance

Depends on usage and position. All elements will require annual cleaning. Galvanised and powder coated mild steel only require maintenance if damaged.

*Please note that when a powder-coat is applied over a hot dip galvanised surface pinholing can occur in the surface finish - this is not considered a defect.

