




# FACTORY FURNITURE

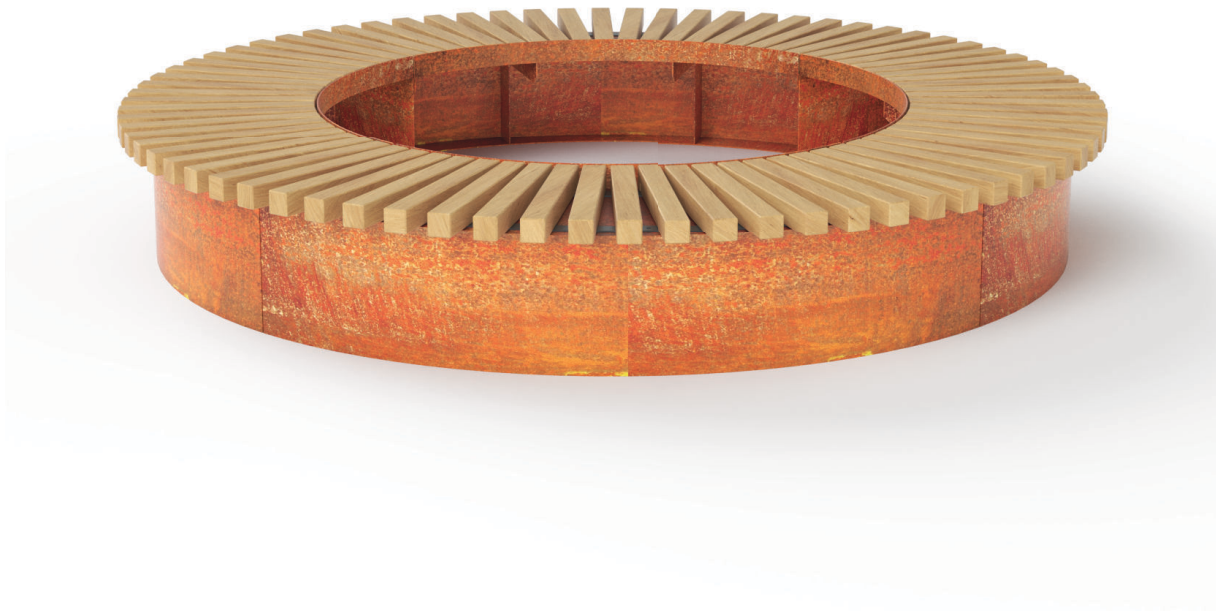

## Cubit Planter Bench

TECHNICAL SHEET



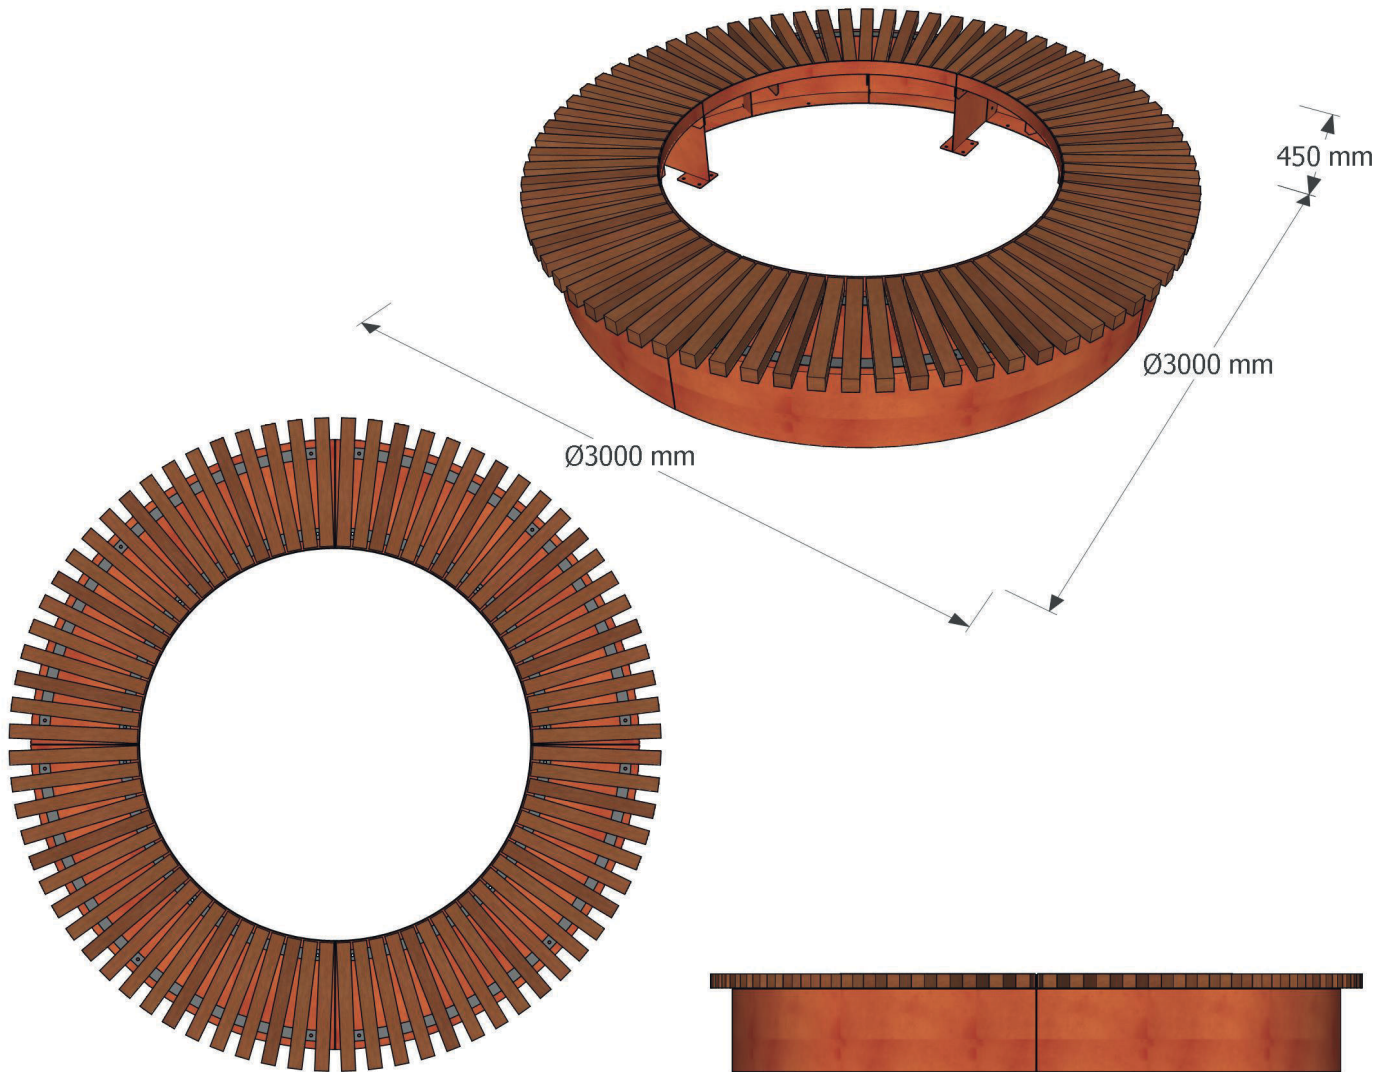

## Composition

Slats - FSC® certified hardwood

Sub frame - Mild steel

Planter - Corten steel



## Finishes

Timber - Untreated sanded finish as standard

Mild steel - Galvanised and polyester powder-coated (grey as standard or as per client's specification)

Corten steel - Untreated finish as standard

## Dimensions

Metric L 3000mm | width 3000mm | height 450mm\*

Imperial L 9' 10" | width 9' 10" | height 1' 5½" \*

\*Not incl. +150mm below ground level for sub-surface fix option

## Approx weight

550kg

## Fixing centres & method

See AutoCAD drawing (available on request) - 20 off Sleeve anchors

## Planter liner capacity

2140ltrs

## Foundation

1 no. Ring pad Ø3000(OD) x 700(w) x 300(D) mm in C20 concrete (recommendation only)

## Handling

Please observe health and safety lifting guidelines. A fork lift or crane will be required for off loading and positioning of product

## Maintenance

Depends on usage and position. All elements will require annual cleaning. Galvanised and powder coated mild steel only require maintenance if damaged.

\*Please note that when a powdercoat is applied over a hot dip galvanised surface pinholing can occur in the surface finish - this is not considered a defect.

